


Armado de Antena Ringo Ranger II / 150-174 MHzz.

Modelo CRX150B

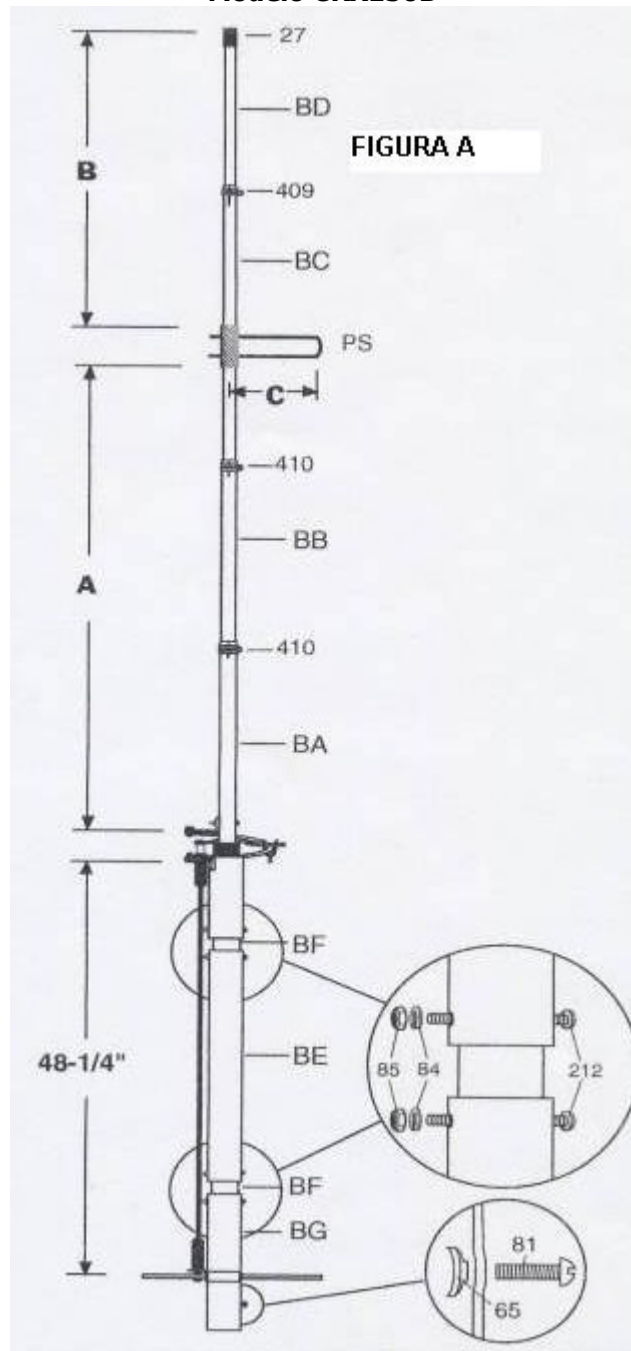


Clave	n°pieza	Muestra	descripción	tamaño	cant.
27	050027		tapa plastica	5/8 (1.6 cm)	1
65	012955		tuerca de fijación	1/4" x 20 (0,64cm)	1
81	010081		tornillo de maquina	1/4".20 x 3/4" (1.91cm)	1
84	010084		golilla de presión	1/4" (0,64cm)	7
85	010085		tuerca hexagonal	1/4" x 20 (0.64cm)	7
212	010212		tornillo de máquina	1/4".20 x 2" (5.08cm)	4
409	030409		abrazadera	3/4" (1.91cm)	1
410	030410		abrazadera	1"(2.54cm)	2
BA			base y anillo de armado		1
BB			tubo de aluminio	24" x 7/8" (60.9 x 2.2cm)	1
BC			sección enfasadora	35" x 3/4" (88.9 x 1.9cm)	1
BD			tubo de aluminio	35" x 5/8" (88.9 x 1.6cm)	1
BE			tubo de aluminio	23-1/4" x 1-1/2" (59.7 x 3.8cm)	1
BF			tubo de aluminio	8" x 1-3/8" (20.3 x 3.5cm)	2
BG			tubo de aluminio	22" x 1-1/2" (55.9 x 3.8cm)	1
PS			Horquilla enfasadora	9.3/4" (24.8cm)	1

TABLA 1

Frequency (MHz)	Dimension A	Dimension B	Dimension C
	in. (cm.)	in. (cm.)	in. (cm.)
146	55 (139.7)	50-1/4 (127.6)	9 (22.9)
148	54-1/4 (137.8)	49-1/2 (125.7)	8-7/8 (22.5)
150	53-1/2 (135.9)	48-3/4 (123.8)	8-3/4 (22.2)
152	52-3/4 (134.0)	48 (121.9)	8-5/8 (21.9)
154	52 (132.1)	47-1/4 (120.0)	8-5/8 (21.9)
156	51-1/4 (130.2)	46-1/2 (118.1)	8-1/2 (21.6)
158	50-1/2 (128.3)	46 (116.8)	8-3/8 (21.3)
160	50 (127.0)	45-1/2 (115.6)	8-1/4 (20.9)
162	49-1/4 (125.1)	45 (114.3)	8-1/4 (20.9)
164	48-3/4 (123.8)	44-1/2 (113.0)	8-1/8 (20.6)
166	48 (121.9)	44 (111.8)	8 (20.3)
168	47-1/2 (120.7)	43-1/2 (110.5)	7-7/8 (20.0)
170	47 (119.4)	43 (109.2)	7-7/8 (20.0)
172	46-1/2 (118.1)	42 (106.7)	7-3/4 (19.7)
174	46 (116.8)	41-1/2 (105.4)	7-5/8 (19.4)