


Bazooka-Dipol

(Monoband breitbandig unempfindlich)

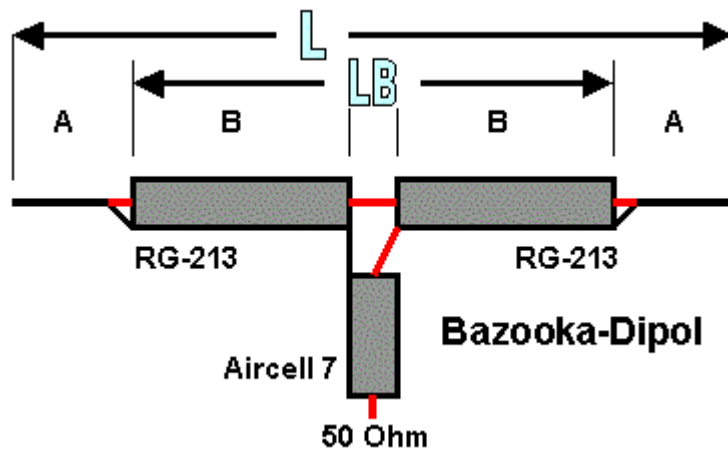

Innenleiter mit Schirmung verlöten

(Wetterfest mit **Polyisobutylene**-Band)

$$L = 142,5 / f \text{ [MHz]}$$

$$B = 49,5 / f \text{ [MHz]}$$

$$A = (L - 2B) / 2$$

MHz	A [m]	B [m]	LB [m]	L [m]
3,60	6,04	13,75	27,50	39,58
3,70	5,88	13,38	26,76	38,51
7,05	3,09	7,02	14,04	20,21
10,10	2,15	4,90	9,80	14,11
14,20	1,53	3,49	6,97	10,04
18,10	1,20	2,73	5,47	7,87
21,20	1,03	2,33	4,67	6,72
24,90	0,87	1,99	3,98	5,72
28,50	0,76	1,74	3,47	5,00
51,00	0,43	0,97	1,94	2,79
435,00	0,05	0,11	0,23	0,33